



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 937 278 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

17.09.2003 Bulletin 2003/38

(21) Application number: **97910132.6**

(22) Date of filing: **17.10.1997**

(51) Int Cl.7: **G02F 1/167, G02F 1/133**

(86) International application number:
PCT/US97/18643

(87) International publication number:
WO 98/019208 (07.05.1998 Gazette 1998/18)

(54) **NONEMISSIVE DISPLAYS AND PIEZOELECTRIC POWER SUPPLIES THEREFOR**

NICHTMITTIERENDE ANZEIGEN UND DEREN PIEZOELEKTRISCHE STROMVERSORGUNG

**AFFICHAGES NON EMISSIFS ET SOURCES D'ALIMENTATION PIEZO-ELECTRIQUES POUR
CES DERNIERS**

(84) Designated Contracting States:
CH DE FR GB LI

(30) Priority: **25.10.1996 US 738260**

(43) Date of publication of application:
25.08.1999 Bulletin 1999/34

(73) Proprietor: **MASSACHUSETTS INSTITUTE OF
TECHNOLOGY
Cambridge, MA 02139 (US)**

(72) Inventors:

- **JACOBSON, Joseph, M.
Cambridge, MA 02138 (US)**
- **COMISKEY, Barrett
Cambridge, MA 02139 (US)**

(74) Representative: **Prutton, Roger
MARKS & CLERK,
Alpha Tower,
Suffolk Street Queensway
Birmingham B1 1TT (GB)**

(56) References cited:

**EP-A- 0 622 721 GB-A- 1 314 906
US-A- 4 185 621 US-A- 4 919 521
US-A- 5 500 635**

- **PATENT ABSTRACTS OF JAPAN vol. 13, no. 454
(P-944) & JP 01 177517 A (KINSEKI), 13 July 1989,**
- **SANKUS. J: "Electrophoretic display cell."
XEROX DISCLOSURE JOURNAL., vol. 4, no. 3,
1979, STAMFORD, CONN US, page 309
XP002052704**

EP 0 937 278 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

[0001] The present invention relates to electronic display elements, and more particularly to nonemissive displays.

BACKGROUND OF THE INVENTION

[0002] Nonemissive displays convey information using contrast differences, which are achieved by varying the reflectance of different frequencies of light; they are thus distinct from traditional emissive displays, which stimulate the eye by emitting light. One type of nonemissive display is an electrophoretic display, which utilizes the phenomenon of electrophoresis to achieve contrast. Electrophoresis refers to movement of charged particles in an applied electric field. When electrophoresis occurs in a liquid, the particles move with a velocity determined primarily by the viscous drag experienced by the particles, their charge, the dielectric properties of the liquid, and the magnitude of the applied field.

[0003] US-A-4 919 521 discloses a nonemissive display comprising a pair of electrodes between which a solid matrix is located, the solid matrix comprises microcapsules containing a suspension of anisotropic particles dispersed in a fluid.

[0004] An electrophoretic display utilizes charged particles of one color suspended in a dielectric liquid medium of a different color (that is, light reflected by the particles) is absorbed by the liquid. The suspension is housed in a cell located between (or partly defined by) a pair of oppositely disposed electrodes, one of which is transparent. When the electrodes are operated to apply a DC or pulsed field across the medium, the particles migrate toward the electrode of opposite sign. The result is a visually observable color change. In particular, when a sufficient number of the particles reach the transparent electrode, their color dominates the display; if the particles are drawn to the other electrode, however, they are obscured by the color of the liquid medium, which dominates instead.

[0005] Ideally, the particles maintain a strong uniform charge throughout the lifetime of the device and move as rapidly as possible under the influence of a relatively small electric field. The switching time of suspended particles located between two electrodes is given by

$$t = \frac{6\pi d^2 \eta}{V \epsilon \zeta}$$

where d is the spacing between electrodes, η is the viscosity of the liquid medium, ϵ is its dielectric constant, V is the potential difference between the electrodes, and ζ is the zeta potential of the particles. The quantity t represents the "switching time," i.e., the time required for

the population of particles to migrate from one of the electrodes to the other. Thus, the system is usually selected to minimize t. For example, the spacing between electrodes is as small as is necessary to ensure that the particles are completely obscured following migration away from the transparent electrode.

[0006] Useful electrophoretic displays are bistable: their state persists even after the activating electric field is removed. This is generally achieved via residual charge on the electrodes and van der Waals interactions between the particles and the walls of the electrophoretic cell. Unfortunately, the stability of current electrophoretic displays is limited. Although flocculation or settling of particles can be avoided by matching the density of the particles with that of the liquid medium, long-term particle agglomeration remains a problem. That is, cohesive forces among particles may eventually overcome dispersive forces, degrading the appearance and function of the display. For example, particle agglomerations respond less efficiently to an applied field (increasing switching time) and are also more vulnerable to the action of gravity (limiting usefulness in arbitrary orientations); thus, if the display is oriented vertically, gravity can overcome adhesion to the cell wall and cause agglomerations to settle.

DESCRIPTION OF THE INVENTION**Brief Summary of the Invention**

[0007] According to the present invention, there is provided an electrophoretic display as defined in Claim 1 below.

[0008] According to the present invention, there is further provided a nonemissive display system as defined in Claim 22 or Claim 24 below.

[0009] In accordance with embodiments of the invention, the foregoing limitations are overcome by microencapsulating individual elements of an electrophoretic display. This approach eliminates the effects of agglomeration on a scale larger than the size of the capsule, which preferably is sufficiently small to be individually unnoticeable. Thus, the capsules function in a manner similar to pixels (although typically they are not individually addressable); even if agglomeration occurs, its effect is confined to a very small area. Furthermore, by setting an upper limit to the possible size of an agglomeration - that is, by preventing accumulations larger than the particle content of a capsule - the bulk effects of diminished field responsiveness and vulnerability to gravity are likewise limited.

[0010] Although, again, individual capsules within a display element are typically not individually addressed, the approach of the invention lends itself to production of relatively small multiple-capsule elements that can themselves be individually addressable components of a larger array. For example, the elements can each present a circular profile and be arrayed as a matrix,

functioning as pixels in an alphanumeric display.

[0011] A preferred embodiment of the invention comprises an electrophoretic display having a substantially two-dimensional arrangement of microscopic containers ("microcapsules"), each microcapsule having there-
 5 in an electrophoretic composition of a dielectric fluid and a suspension of particles that visually contrast with the dielectric liquid and also exhibit surface charges; a pair of electrodes, at least one of which is visually transparent, disposed on and covering opposite sides of the mi-
 10 crocapsule arrangement; and means for creating a potential difference between the two electrodes, the potential difference causing the particles to migrate toward one of the electrodes. The microcapsule arrangement can be flat or curved; as used herein, the term "two-di-
 15 mensional" refers to arrangements that may be fully planar, distorted or curved, and does not exclude some three-dimensional thickness. The arrangement can involve packing the microcapsules against one another in an array (generally one microcapsule thick), dispersing the microcapsules in a transparent matrix, or forming cavities or voids within such a matrix that themselves constitute the microcapsules.

[0012] Embodiments of the invention provide novel means of electrically powering nonemissive displays using one or more piezoelectric elements (such as a sheet of polyvinylidene fluoride). Generally, the invention in this aspect may comprise a pair of oppositely disposed electrodes and, located therebetween, at least one display element, the display element being visually respon-
 25 sive to a potential difference between the electrodes; and a piezoelectric element connected to the electrodes, deformation of the piezoelectric element

Brief Description of the Drawings

[0013] The foregoing discussion will be understood more readily from the following detailed description of the invention, when taken in conjunction with the accom-
 30 panying drawings, in which:

FIGS. 1A-1B are enlarged sectional views showing microencapsulated electrophoretic display ar-
 35 rangements in accordance with the present invention;

FIGS. 2A and 2B schematically illustrate piezoelectric driver circuitry useful for operating nonemissive displays including (but not limited to) those depicted in FIGS. 1A-1B;

FIG. 3 is a schematic elevation of a specific appli-
 40 cation of the invention in a footwear environment;

FIG. 4A is a schematic elevation of another foot-
 45 wear application;

FIG. 4B schematically illustrates representative cir-

cuitry for implementing the application shown in FIG. 4A;

FIG. 5 is a partially schematic isometric view of a specific application of the invention in a paper pub-
 5 lication environment;

FIG. 6A is a partly schematic plan view of a specific application of the invention in a wristwatch environ-
 10 ment; and

FIG. 6B schematically illustrates representative cir-
 15 cuitry for implementing the application shown in FIG. 7A;

FIG. 7 is a partially schematic isometric view of the invention implemented in an acoustically coupled mode.

20 Detailed Description of the Preferred Embodiments

[0014] Refer first to FIGS. 1A-1B, which illustrate alternative embodiments of microencapsulated electro-
 25 phoretic display arrangements in accordance with the present invention. In FIG. 1A, a display 120 includes a pair of planar electrodes 125, 130 which reside on opposite sides of a substantially planar arrangement of microscopic containers, or microcapsules, 133. At least electrode 130 is visually transparent so that a viewer
 30 may observe the color exhibited by portions of the microcapsules 133 adjacent to electrode 130. For example, electrode 130 may comprise a semiconductor such as indium tin oxide evaporated or otherwise coated in a thin layer onto glass, mylar or other transparent sub-
 35 strate; the details of fabrication are well known to those skilled in the art, as are possible semiconductor alternatives to indium tin oxide (*see, e.g.*, U.S. Patent Nos. 3,668,106 and 4,305,807, the entire disclosures of which are hereby incorporated by reference).

[0015] Within each microcapsule 133 is an electro-
 40 phoretic suspension comprising a dielectric liquid 135 and a quantity of charged particles 137, the bulk liquid and the particles contrasting visually (*i.e.*, exhibiting observably distinguishable colors or shades). A driver circuit 140 is electrically connected to electrodes 125, 130 and is capable of creating a sufficient potential differ-
 45 ence between the electrodes to cause migration of particles 137 to one or the other electrode within an acceptable switching time.

[0016] To impart the color of particles 137 to the display 120, driver circuit 140 creates an electric field (in-
 50 dicated by arrows 142) whose direction is such that particles 137 are attracted to, and migrate toward, electrode 130. In the illustrated embodiment, microcapsules 133 are spherical and substantially tangent to one another; accordingly, if each microcapsule 133 contains a quan-
 55 tity of particles 137 sufficient to cover half the inner surface area under the influence of an electric field, attrac-

tion of particles 137 toward electrode 130 will impart the color of the particles to display 120 in a substantially uniform, uninterrupted manner.

[0017] Microcapsules 133 need not be strictly spherical, but preferably have dimensions ranging from 5 to 500 μm , and ideally from 25 to 250 μm . The walls of microcapsules 133 should exhibit a resistivity similar to that of dielectric liquid 135. It may also be useful to match the refractive index of the microcapsules 133 with that of the electrophoretic composition. Ordinarily, liquid 135 is hydrophobic, and techniques for encapsulating a hydrophobic internal phase are well characterized in the art. The process selected may impose limitations on the identity and properties of the dielectric liquid; for example, certain condensation processes may require dielectric liquids with relatively high boiling points and low vapor pressures.

[0018] In one approach, known as "coacervation," an oil/water emulsion is formed by dispersing the electrophoretic composition (i.e., the hydrophobic dielectric liquid containing a suspension of the pigment particles 137) in an aqueous environment. One or more colloids are coacervated (i.e., agglomerated) out of the aqueous phase and deposited as shells around the oily droplets through control of temperature, pH and/or relative concentrations, thereby creating the microcapsule. Materials suitable for coacervation include gelatins and gum arabic. *see, e.g.*, U.S. Patent No. 2,800,457.

[0019] The "interfacial polymerization" approach relies on the presence of an oil-soluble monomer in the electrophoretic composition, which once again is present as an emulsion in an aqueous phase. The monomers in the minute hydrophobic droplets react with a monomer introduced into the aqueous phase, polymerizing at the interface between the droplets and the surrounding aqueous medium and forming shells around the droplets. Although the resulting walls are relatively thin and may be permeable, this process does not require the elevated temperatures characteristic of some other processes, and therefore affords greater flexibility in terms of choosing the dielectric liquid.

[0020] Our preferred microencapsulation technique is "in-situ polymerization," in which the monomers that will form the microcapsule shell are present in the aqueous phase rather than within the dispersed-phase droplets. The monomers polymerize to form a polymer with higher affinity for the internal phase than for the aqueous phase, thus condensing around the droplets as a skin. In one especially useful in-situ polymerization processes, urea and formaldehyde condense in the presence of poly(acrylic acid); *see* U.S. Patent No. 4,001,140. In other useful process, described in U.S. Patent No. 4,273,672, any of a variety of cross-linking agents borne in aqueous solution is deposited around microscopic oil droplets. Such cross-linking agents include formaldehyde, glyoxal, glutaraldehyde and other formaldehyde donors, trioxane, ethanolamine, ethylenediamine, boric acid, borates such as sodium borate, or macromolecular

species such as gelatin, gum tragacanth, methylcellulose and A-stage formaldehyde condensation products.

[0021] Other useful techniques for creating microcapsules include mechanical methods, as are well known to those skilled in the art and described, for example, in U.S. Patent No. 3,585,381.

[0022] A wide range of dielectric liquids may be used with the present invention; the criteria involved in their choice includes viscosity, dielectric constant, acquired charge and density. Preferred liquids include darkly colored hydrophobic fluids, such as isoparaffinic petroleum solvent or trichlorotrifluoroethane, or a mixture thereof; and other halogenated hydrocarbons, since these tend to exhibit desirably high densities (to match that of the dispersed particles) while having desirable electrical characteristics. To further darken or impart a specific color to the liquid, a dye (e.g., an oil dye such as Oil Blue N) or other colorant (e.g., cobalt naphthenate for a violet color, manganese naphthenate for a brown color, or nickel naphthenate for a green color) can be added thereto.

[0023] A wide range of pigment particles are also useful, the primary criteria governing their choice being appropriate charge, size and color. The particles can range in size from 100 μm to less than 1 μm , but a preferred size range is 5-25 μm . The particles may exhibit a native charge, or be charged explicitly using a charge-control agent, or may acquire a charge when suspended in the dielectric liquid. Useful particulate materials include titanium dioxide (TiO_2), which provides a high-reflectance white appearance; acetylene black or other black electrophotographic toner particles; other inorganic pigments; or organic pigments such as azo and phthalocyanine materials. Typically, a charge-control agent is added to the pigment particles to confer a surface charge (zeta potential). The charge-control agent may be capable of adsorbing directly onto the particle surfaces, or mixed in during fabrication of the particles. Generally, the charge-control agent confers a zeta potential equal to 50-100 elementary charges on the surface of a particle 1 μm in radius; this produces a sufficient electrophoretic mobility on the order of 10^{-4} to 10^{-5} $\text{cm}^2/\text{V}\text{-sec}$. Suitable charge-control agents are well known in the art; they may be polymeric or non-polymeric in nature, and may also be ionic or non-ionic. Non-ionic polymeric charge-control agents include polyethylene, polybutene succinimide and various polyvinyl pyridine block copolymers. *See, e.g.*, U.S. Patent Nos. 5,380,362, 5,066,559 and 4,298,448 The charge-control agent (and any underlying coating) should not interfere with the optical properties of the pigment particles. In a preferred embodiment, a mixture of TiO_2 particles and polyethylene is atomized to produce electrophoretic spheres that are largely polyethylene.

[0024] The display 120 may be formed, for example, in the manner of fabricating liquid-crystal displays. For example, after their formation, microcapsules 133 containing the electrophoretic composition may be injected

into a cell housing two spaced-apart electrodes. Alternatively, microcapsules 130 may be "printed" into a display by any of various methods known in the art, e.g., the techniques used to deposit pressure-rupturable microcapsules onto a substrate to create carbonless copy paper; in this case, the particles are printed onto one of the electrodes 125, 130, after which the other electrode is deposited, printed, or otherwise coated on top of the deposited microcapsules 130.

[0025] In an alternative embodiment 145, illustrated in FIG. 1B, microcapsules 133 are immobilized within a transparent matrix or binder 150 that is itself sandwiched between electrodes 125, 130. Once again, application of the appropriately directed electric field results in migration of particles 137 toward transparent electrode 130. So long as microcapsules 133 are dispersed within matrix 150 uniformly and at sufficient density, the resulting visual appearance will be uniform. Matrix 150 is preferably a transparent polymeric material that may be cured (i.e., cross-linked from a low-viscosity state into extremely high viscosity) or otherwise solidified at relatively low temperatures, and which readily accepts, in its low-viscosity state, a dispersion of microcapsules. Useful materials include polyvinyl alcohols, gelatins, epoxies and other resins.

[0026] The low-viscosity polymer precursor, into which microcapsules 133 have been suspended at an adequate dispersion density, may be cured in a mold conforming to the two-dimensional or curved shape of electrodes 125, 130, or may instead utilize the electrodes as containment boundaries for an in-situ cure.

[0027] Alternatively and not falling within the scope of the present invention, microcapsules 133 can be voids or microscopic cavities in matrix 150 formed during its cure. For example, the electrophoretic composition can be dispersed as an emulsion in the uncured (low-viscosity) precursor to matrix 150; curing of the precursor leaves the emulsion droplets suspended and immobilized within the matrix, effectively forming a polymer-dispersed electrophoretic display.

[0028] The display can be arranged in any number of configurations, including a unitary, continuous display (i.e., a contiguous extent of microcapsules sandwiched between a single electrode pair); a row or other pattern of discrete groups of microcapsules controlled by a single electrode pair; or multiple-element arrangements containing a plurality of independently addressable display elements, each controlled by a separate electrode pair and comprising, for example, a single continuous display or a pattern of microcapsule groups. Driver 140 can be any suitable power supply, e.g., a DC or pulsed DC circuit, or an AC circuit (where the pulse width or AC period is greater than the switching time of the electrophoretic composition).

[0029] In accordance with another aspect of the invention, however, driver 140 comprises a piezoelectric element. Refer to FIG. 2A, which illustrates the manner in which such an element can be used to drive an elec-

trophoretic display element 200, which comprises one or more individual electrophoretic displays. Physical deformation of the piezoelectric element 202 generates a voltage and current. The electrical output of element 202 may, if appropriate, be supplied directly to display 200; however, it is generally useful to condition the output first. For example, opposite deformations of element 202 produce voltages of opposite polarity; if element 202 is alternately deformed at a rate faster than the switching time of display 200, the display 200 will not respond. A voltage-conditioning circuit 204 may limit or augment the voltage produced by piezoelectric element 202, and may also include a smoothing filter to reduce variation in the voltage output or dampen the response of display 200. In operation, as the piezoelectric element is flexed in different directions, the electric field it produces changes in polarity, causing the charged particles in the electrophoretic display 200 to migrate away from one electrode and toward the other.

[0030] It should be stressed that display element 200 is not limited to the electrophoretic displays shown in FIGS. 1A-1B; the approach illustrated in FIG. 2A is applicable to any nonemissive display (e.g., liquid-crystal or electrophoretic displays), regardless of particular features, whose response characteristics are suited to the output of element 202.

[0031] A more elaborate arrangement is shown in FIG. 2B. Here, the output of conditioning circuitry 204 is provided as a power supply to a processor 206, and reaches display element via one or more switches 208 controlled by processor 206. Voltage conditioner 204 therefore rectifies and limits the magnitude of the voltage reaching processor 206, which may itself be a programmable, single-chip microprocessor or other suitable circuitry for implementing a control function. Switches 208 may be transistors, the number of which depends on the number of individual electrophoretic display components in element 200. For example, processor 206 can be configured to close one of the switches 208 and thereby provide power to one of the components of display element 200-upon detection of some external condition or at a predetermined time.

[0032] Refer now to FIG. 3, which illustrates a particular application of the invention integrated within an article of footwear apparel 300, such as a shoe. The article 300 includes a bottom portion or sole 302. Disposed within sole 302 is a flexible piezoelectric element 305, e.g., a sheet of polyvinylidene difluoride. The two outputs 307a, 307b are connected to the electrodes of a first electrophoretic display 310, and in the opposite sense to the electrodes, of a second electrophoretic display 312. As the wearer of article 300 takes a step, s/he flexes piezoelectric element 305, producing a voltage of a first polarity sufficient to activate one of the displays 310, 312 (i.e., attract the particles to the visible electrode) and deactivate the other display (i.e., draw the particles away from the visible electrode). As the user completes a step, piezoelectric element 305 flattens,

producing a voltage of opposite polarity and reversing the respective visual appearances of displays 310, 312. The switching time of the displays is faster than the rate of a normal gait. Again, the configuration shown in FIG. 3 can include voltage-conditioning circuitry if needed.

[0033] FIG. 4A illustrates another application of the invention in the environment of footwear apparel, in this case a pedometer. An article of footwear 400, such as a running shoe, includes a bottom portion or sole 402 associated with a piezoelectric element 405. The outputs of piezoelectric element 405 are connected to a control circuit, described below, that governs the operation of a series of individual electrophoretic displays 412a-g. The number of such displays "turned on" (or "turned off") at any time reflects the number of deformations of piezoelectric element 405 and, hence, the number of steps taken. As shown in FIG. 4B, a suitable circuit 410 includes a full-wave rectifier or bridge 415, the rectified output of which is provided to a capacitor 417 connected in parallel with electrophoretic displays 412a-g. Each display is also connected to a respective diode 420a-g. The diodes 420a-g in the series have increasingly greater breakdown voltages. In operation, all of the electrophoretic displays are initially in the same state. Regular flexing and straightening of piezoelectric element 405 results in an approximately AC voltage output, which is rectified by bridge 415. Each pulse from bridge 415 adds charge onto the plates of capacitor 417, increasing the voltage across the capacitor and, hence, across the diode/display pairs. Each of the displays 412a-g changes state only when the accumulated charge on capacitor 417 exceeds the breakdown voltage of the associated diode. The charge on capacitor 417, of course, reflects the number of steps taken, which therefore determines the number of displays 412a-g that will have changed state. To reset the device, the user activates a switch (not shown) which reverses the connection of capacitor 417 across the diode/display pairs, bypassing the diodes and resetting the displays, and subsequently discharging capacitor 417. The circuit may also include an additional diode or other means for reducing or eliminating the high voltages caused by rapid foot travel, and means for programming the length of the user's stride so that the display reflects distance instead of steps taken.

[0034] FIG. 5 illustrates the manner in which the invention can be applied to a paper substrate, such as a book, periodical or greeting card. In the depicted embodiment, a greeting card 500 comprises a central fold 502 and a piezoelectric element 505 disposed thereon. Piezoelectric element 505 is connected (e.g., via a pair of foil traces or other conductors) to a driver circuit 507, which is itself connected to a series of three electrophoretic displays 510a, 510b, 510c via an associated, user-actuable switch 512a, 512b, 512c. Each of displays 510a, 510b, 510c may spell out, for example, a different message. Circuit 507 includes a capacitive storage device that accumulates charge from the cur-

rent produced by the user's opening of card 500, which deforms piezoelectric element 505. The stored charge is transferred to one of the displays 510a, 510b, 510c through the user's selection of the appropriate switch. A similar arrangement can be used in conjunction with a book or periodical.

[0035] The piezoelectric element powering an electrophoretic display need not be activated by direct deformation. Instead, it can be driven by acoustic coupling to another piezoelectric element that is itself subjected to a varying electric field (causing it to deform in proportion to the magnitude of the applied field). Such coupling can conveniently take place on length scales of 5 inches or less for typical piezoelectric displays.

[0036] Refer to FIG. 6A, which shows how this effect can be exploited in the context of a wristwatch 600. Inside the watch case 602 is a piezoelectric element 604 and an oscillator circuit 606; both of these components may be associated with the timekeeping function of watch 600. The oscillator 606 receives power from an autonomous source (e.g., a battery, not shown) and applies an AC current to piezoelectric element 604. Attached to (or embedded within) the watch band 610 is a second piezoelectric element 612 acoustically coupled to piezoelectric element 604. The 4 outputs of element 612 are provided to a driver circuit 614, which utilizes electrical energy from element 612 to power an electrophoretic display 616. With this simple arrangement, the display 616 would constantly be "turned on."

[0037] For this reason, driver circuits 606 and 614 are preferably somewhat more sophisticated, as illustrated in FIG. 6B. Driver 606 is capable of oscillation at two or more frequencies f_1, f_2 . Driver circuit 614 includes a pair of notch or bandpass filters 620, 622 each tuned to a different one of the frequencies f_1, f_2 . That is, each of filters 620 operates within a very narrow frequency band, dropping (or passing) one of the frequencies f_1, f_2 without affecting other frequencies. The outputs of filters 620, 622 are oppositely connected to display 616; the filters also contain rectifiers so that their outputs to display 616 do not vary in polarity, and any other conditioning circuitry desired for the particular application.

[0038] Suppose, for example, that filter 620 drops frequency f_1 and filter 622 drops frequency f_2 . Operation of driver 606 at f_1 acoustically couples piezoelectric elements 604 and 612; however, electrical energy from piezoelectric element 612 reach display 616 only through filter 622, placing display 616 in a particular visual state. Operation of driver 606 at f_2 reverses the effect produced by filter 622, placing display 616 in the opposite state, since electrical energy passes only through filter 620. The foregoing circuit is useful, for example, in setting and resetting a visual alarm.

[0039] The approach of using filters and a single driven "transmitter" piezoelectric element capable of being driven at different frequencies and, therefore, selectively coupled acoustically to multiple "receiver" elements finds application in a wide variety of applications. For

example, returning to the embodiment illustrated in FIG. 5, a periodical displayed at a newsstand or an advertising installation might contain several electrophoretic displays, each connected to a piezoelectric element via a differently tuned filter. By altering the frequency at which the transmitter element is driven, it is possible to cycle through the various displays in any desired pattern.

[0040] The foregoing approach can also be applied, for example, to a pager or other messaging device having a piezoelectric speaker. As shown in FIG. 7, such a device 700 includes an autonomously powered driver circuit 702 that activates a piezoelectric speaker 704 upon receiving a broadcast radio signal from a central station. Such devices are widely used and commonly available. To this device is added a second piezoelectric element 706 acoustically coupled to speaker 704; driver circuitry 708 as discussed previously; and an electrophoretic display 710. When speaker 704 produces its audible alarm, piezoelectric element 706 causes display 710 to change state, thereby providing a visual alarm indication. The display 710 can be used to convey other useful information to the user of a watch, pager, cellular telephone or other portable electronic device (e.g., the status of the battery).

[0041] It will therefore be seen that the foregoing represents a reliable and highly flexible approach to the fabrication and powering of electrophoretic and other non-emissive displays.

Claims

1. An electrophoretic display comprising:
 - a. an arrangement of discrete depositable microcapsules, each microcapsule comprising a capsule wall and being no longer than 500 μm along any dimension thereof;
 - b. first and second electrodes disposed on and covering opposite sides of the arrangement, at least one of the electrodes being substantially visually transparent;
 - c. means for creating a potential difference between the two electrodes; and
 - d. within the capsule wall of each microcapsule, a dielectric fluid and a suspension therein of particles exhibiting surface charges, the fluid and the particles contrasting visually, the potential difference causing the particles to migrate toward one of the electrodes.
2. The display of claim 1 wherein each microcapsule is no longer than 5 μm along any dimension thereof.
3. The display of claim 1 wherein each microcapsule has an average dimension ranging from 25 to 250 μm .
4. The display of claim 1 wherein the particles have average diameters no greater than 100 μm .
5. The display of claim 1 wherein the particles have average diameters ranging from 5 to 25 μm .
6. The display of claim 1 wherein the fluid has a fluid density and the particles each have a particle density, the fluid and particle densities being substantially equal.
7. The display of claim 1 wherein the particles comprise TiO_2 and the dielectric fluid comprises a darkly colored dye therein.
8. The display of claim 1 wherein the dielectric fluid comprises at least one of (i) isoparaffinic petroleum solvent and (ii) trichlorotrifluoroethane.
9. The display of claim 7 wherein the particles each comprise a core and, bound thereto, a charge-control additive.
10. The display of claim 1 wherein the microcapsules have interior surfaces exhibiting a resistivity, the fluid exhibiting a resistivity substantially equal to the resistivities of the interior surfaces.
11. The display of claim 11 wherein the microcapsules are in contact with one another in an array.
12. The display of claim 1 wherein the microcapsules are dispersed in a solid matrix.
13. The display of claim 1 wherein the means for creating a potential difference comprises a piezoelectric element.
14. The display of claim 13 wherein said microcapsules are arranged as a plurality of selectably actuatable nonemissive, bistable display elements located between said first and second electrodes, the display elements undergoing a visual response in reaction to a potential difference between the electrodes, the visual response persisting notwithstanding removal of the potential difference.
15. The display of claim 14, further comprising:
 - a housing defining a foot enclosure including a sole, the piezoelectric element being associated with the enclosure such that flexion thereof produces the potential difference; and
 - means, connected to the piezoelectric element, for selectably coupling the display elements to the piezoelectric element based on a count of flexions and in a pattern representative of the count.

16. The display of claim 14 wherein said piezoelectric element is associated with a paper substrate such that folding of the paper substrate deforms the piezoelectric element; and said display comprises means for selectably connecting at least one display element to the piezoelectric element, deformation of the piezoelectric element producing the visual responses in the at least one display element connected thereto.

17. The display of claim 13 wherein said microcapsules are arranged as at least one display element, the display element being visually responsive to a potential difference between the electrodes; and said piezoelectric element is a display piezoelectric element, said display further comprising a driver piezoelectric element acoustically coupled to the display piezoelectric element; means for applying an AC voltage to the driver element at a driver frequency so as to cause the display piezoelectric element to produce an AC voltage; and means for rectifying the AC voltage from the display piezoelectric element, the rectified voltage providing the potential difference.

18. The display of claim 17 wherein said means for applying an AC voltage to the driver element causes the display piezoelectric element to produce an AC voltage, the AC voltage providing the potential difference; said display further comprising:

at least one filter intervening between the display piezoelectric element and the electrodes, the at least one filter configured to (i) pass AC within a predetermined frequency band so that the display is unaffected by driver frequencies outside the predetermined band, or (ii) drop AC within a predetermined frequency band so that the display is affected only by driver frequencies outside the predetermined band; and means, connected to the display piezoelectric element, for rectifying the AC voltage from the filter and thereby providing the potential difference.

19. The display of claim 18 wherein the at least one filter is a bandpass filter or a notch filter.

20. The display of claim 18 comprising first and second filters arranged in parallel and oppositely connected to the display element, the first filter passing or dropping AC within a first frequency band and the second filter passing or dropping AC within a second frequency band, selective application to the display piezoelectric element of AC within the first and second frequencies producing opposite visual responses from the display.

21. The display of claim 20 wherein the first and second filters are bandpass or notch filters.

22. A nonemissive display system comprising an electrophoretic display as defined in claim 13.

23. The display of claim 18 further comprising:

- a. a watchcase for containing the driver piezoelectric element; and
- b. a watch band, attached to the watch case, for bearing the display piezoelectric element.

24. A nonemissive display system comprising:

- a. a paper substrate;
- b. at least one electrophoretic display element associated with the paper substrate, the electrophoretic display element comprising discrete depositable microcapsules each containing a dielectric fluid and a suspension therein of particles exhibiting surface charges, the fluid and the particles contrasting visually;
- c. a power source for creating a potential difference across the at least one display element; and
- d. a means for selectably actuating the power source.

25. The display system of claim 24 wherein the power source is a piezoelectric element.

26. The display system of claim 25 wherein the piezoelectric element is associated with said paper substrate such that folding of the paper substrate deforms the piezoelectric element, thereby creating the potential difference.

Patentansprüche

1. Elektrophoretische Anzeige, umfassend:

- a. eine Anordnung diskreter, sich abscheidender Mikrokapseln, wobei jede Mikrokapsel eine Kapselwand umfaßt und in keiner ihrer Abmessungen länger als 500 µm ist;
- b. erste und zweite Elektroden, die auf gegenüberliegenden Seiten der Anordnung angeordnet sind und diese überdecken, wobei zumindest eine der Elektroden im wesentlichen visuell transparent ist;
- c. eine Einrichtung zum Erzeugen einer Potentialdifferenz zwischen den beiden Elektroden; und
- d. innerhalb der Kapselwand jeder Mikrokapsel, ein dielektrisches Fluid und eine Suspension von Partikeln in diesem, die Oberflächen-

- ladungen aufweisen, wobei das Fluid und die Partikel visuell kontrastieren, wobei die Potentialdifferenz bewirkt, daß die Partikel zu einer der Elektroden wandern.
2. Anzeige nach Anspruch 1, wobei jede Mikrokapsel in keiner ihrer Abmessungen länger als 5 µm ist.
 3. Anzeige nach Anspruch 1, wobei jede Mikrokapsel eine durchschnittliche Abmessung hat, die von 25 bis 250 µm reicht.
 4. Anzeige nach Anspruch 1, wobei die Partikel durchschnittliche Durchmesser haben, die nicht größer als 100 µm sind.
 5. Anzeige nach Anspruch 1, wobei die Partikel durchschnittliche Durchmesser haben, die von 5 bis 25 µm reichen.
 6. Anzeige nach Anspruch 1, wobei das Fluid eine Fluiddicke hat und die Partikel jeweils eine Partikeldicke haben, wobei die Fluiddicke und die Partikeldicke im wesentlichen gleich sind.
 7. Anzeige nach Anspruch 1, wobei die Partikel TiO₂ umfassen und das dielektrische Fluid einen dunkel-farbigem Farbstoff umfaßt.
 8. Anzeige nach Anspruch 1, wobei das dielektrische Fluid mindestens eines, nämlich (i) Isoparaffin-Petroleumlösemittel und/oder (ii) Trichlortrifluorethan umfaßt.
 9. Anzeige nach Anspruch 7, wobei die Partikel jeweils einen Kern und, mit diesem verbunden, einen Ladungssteuerungszusatz umfassen.
 10. Anzeige nach Anspruch 1, wobei die Mikrokapseln Innenflächen haben, die einen spezifischen Widerstand aufweisen, wobei das Fluid einen spezifischen Widerstand aufweist, der im wesentlichen gleich den spezifischen Widerständen der Innenflächen ist.
 11. Anzeige nach Anspruch 1, wobei die Mikrokapseln in einer Anordnung miteinander in Kontakt sind.
 12. Anzeige nach Anspruch 1, wobei die Mikrokapseln in einer Festkörpermatrix dispergiert sind.
 13. Anzeige nach Anspruch 1, wobei die Einrichtung zum Erzeugen einer Potentialdifferenz ein piezoelektrisches Element umfaßt.
 14. Anzeige nach Anspruch 13, wobei die Mikrokapseln als eine Vielzahl von wählbar ansteuerbaren, nichtemittierenden, bistabilen Anzeigeelementen angeordnet sind, die sich zwischen der ersten und zweiten Elektrode befinden, wobei die Anzeigeelemente einer visuellen Wirkung als Reaktion auf eine Potentialdifferenz zwischen den Elektroden ausgesetzt sind, wobei die visuelle Wirkung trotz des Abbaus der Potentialdifferenz bestehen bleibt.
- 5
15. Anzeige nach Anspruch 14, ferner umfassend:
- 10 eine Umhausung, die eine Fußumhüllung mit einer Sohle bildet, wobei das piezoelektrische Element der Umhausung so zugeordnet ist, daß deren Biegung die Potentialdifferenz erzeugt; und
 - 15 eine Einrichtung, die mit dem piezoelektrischen Element verbunden ist, zum wählbaren Kopeln der Anzeigeelemente mit dem piezoelektrischen Element auf der Grundlage eines Zählwerts der Biegungen und nach einem Muster, das den Zählwert darstellt.
- 20
16. Anzeige nach Anspruch 14, wobei das piezoelektrische Element einem Papiersubstrat zugeordnet ist, so daß ein Falten des Papiersubstrats das piezoelektrische Element deformiert; und die Anzeige eine Einrichtung zum wählbaren Verbinden mindestens eines Anzeigeelements mit dem piezoelektrischen Element umfaßt, wobei die Deformation des piezoelektrischen Elements visuelle Wirkungen in dem mindestens einen Anzeigeelement erzeugt, das mit diesem verbunden ist.
- 25
17. Anzeige nach Anspruch 13, wobei die Mikrokapseln als mindestens ein Anzeigeelement angeordnet sind, wobei das Anzeigeelement auf eine Potentialdifferenz zwischen den Elektroden visuell anspricht; und das piezoelektrische Element ein piezoelektrisches Anzeigeelement ist, wobei die Anzeige ferner umfaßt: ein piezoelektrisches Treiber-element, das mit dem piezoelektrischen Anzeigeelement akustisch gekoppelt ist; eine Einrichtung zum Anlegen einer Wechselspannung an das Treiber-element mit einer Treiberfrequenz, um zu bewirken, daß das piezoelektrische Anzeigeelement eine Wechselspannung erzeugt; und eine Einrichtung zum Gleichrichten der Wechselspannung von dem piezoelektrischen Anzeigeelement, wobei die gleichgerichtete Spannung die Potentialdifferenz hervorruft.
- 30
- 35
- 40
- 45
- 50
- 55
18. Anzeige nach Anspruch 17, wobei die Einrichtung zum Anlegen einer Wechselspannung an das Treiber-element bewirkt, daß das piezoelektrische Anzeigeelement eine Wechselspannung erzeugt, wobei die Wechselspannung die Potentialdifferenz hervorruft; wobei die Anzeige ferner umfaßt:
- mindestens ein Filter, das zwischen dem pie-

- zoelektrischen Anzeigeelement und den Elektroden angeordnet ist, wobei das mindestens eine Filter so konfiguriert ist, daß (i) ein Wechselstrom innerhalb eines vorbestimmten Frequenzbandes durchgelassen wird, so daß die Anzeige von Treiberfrequenzen außerhalb des vorbestimmten Bandes unbeeinflusst ist; oder (ii) ein Wechselstrom innerhalb eines vorbestimmten Frequenzbandes ausgestaffelt wird, so daß die Anzeige nur durch Treiberfrequenzen außerhalb des vorbestimmten Bandes beeinflusst wird; und eine Einrichtung, die mit dem piezoelektrischen Anzeigeelement verbunden ist, zum Gleichrichten der Wechselfspannung vom Filter und dadurch bedingtes Bewirken der Potentialdifferenz.
19. Anzeige nach Anspruch 18, wobei das mindestens eine Filter ein Bandpaßfilter oder ein Kerbfilter ist.
20. Anzeige nach Anspruch 18, umfassend erste und zweite Filter, die parallel und gegeneinander mit dem Anzeigeelement verbunden sind, wobei das erste Filter Wechselstrom innerhalb eines ersten Frequenzbandes durchläßt oder ausstaffelt und das zweite Filter Wechselstrom innerhalb eines zweiten Frequenzbandes durchläßt oder ausstaffelt, wobei ein selektives Anlegen von Wechselfspannung an das piezoelektrische Anzeigeelement innerhalb der ersten und zweiten Frequenz entgegengesetzte visuelle Wirkungen der Anzeige erzeugt.
21. Anzeige nach Anspruch 20, wobei das erste und zweite Filter ein Bandpaß- oder Kerbfilter sind.
22. Nichtemittierendes Anzeigesystem, umfassend eine elektrophoretische Anzeige nach Anspruch 13.
23. Anzeige nach Anspruch 18, ferner umfassend:
- ein Uhrengehäuse zum Aufnehmen des piezoelektrischen Treiberelements; und
 - ein Uhrenarmband, das am Uhrengehäuse befestigt ist, zum Tragen des piezoelektrischen Anzeigeelements.
24. Nichtemittierendes Anzeigesystem, ferner umfassend:
- ein Papiersubstrat;
 - mindestens ein elektrophoretisches Anzeigeelement, das dem Papiersubstrat zugeordnet ist, wobei das elektrophoretische Anzeigeelement diskrete, sich abscheidende Mikrokapseln umfaßt, die jeweils ein dielektrisches Fluid und eine Suspension von Partikeln in diesem
- enthalten, die Oberflächenladungen aufweisen, wobei das Fluid und die Partikel visuell kontrastieren;
- eine Stromquelle zum Erzeugen einer Potentialdifferenz über dem mindestens einen Anzeigeelement; und
 - eine Einrichtung zum wählbaren Betätigen der Stromquelle.
25. Anzeigesystem nach Anspruch 24, wobei die Stromquelle ein piezoelektrisches Element ist.
26. Anzeigesystem nach Anspruch 25, wobei das piezoelektrische Element dem Papiersubstrat so zugeordnet ist, daß ein Falten des Papiersubstrats das piezoelektrische Element deformiert, wodurch die Potentialdifferenz erzeugt wird.

20 Revendications

1. Un dispositif de visualisation électrophorétique comprenant:
- un arrangement de micro-capsules discrètes pouvant être déposées, chaque micro-capsule comprenant une paroi de capsule et n'ayant aucune dimension supérieure à 500 µm;
 - des première et seconde électrodes disposées sur des faces opposées de l'arrangement et recouvrant celles-ci, l'une au moins des électrodes étant pratiquement visuellement transparente;
 - un moyen pour créer une différence de potentiel entre les deux électrodes; et
 - à l'intérieur de la paroi de capsule de chaque micro-capsule, un fluide diélectrique et une suspension à l'intérieur de celui-ci de particules présentant des charges de surface, le fluide et les particules formant un contraste visuel, et la différence de potentiel occasionnant une migration des particules vers l'une des électrodes.
2. Le dispositif de visualisation de la revendication 1, dans lequel chaque micro-capsule n'a aucune dimension supérieure à 5 µm.
3. Le dispositif de visualisation de la revendication 1, dans lequel chaque micro-capsule a une dimension moyenne allant de 25 à 250 µm.
4. Le dispositif de visualisation de la revendication 1, dans lequel les particules ont des diamètres moyens ne dépassant pas 100 µm.
5. Le dispositif de visualisation de la revendication 1, dans lequel les particules ont des diamètres

moyens allant de 5 à 25 µm.

6. Le dispositif de visualisation de la revendication 1, dans lequel le fluide a une densité de fluide et chaque particule a une densité de particule, les densités de fluide et de particule étant pratiquement égales. 5
7. Le dispositif de visualisation de la revendication 1, dans lequel les particules consistent en TiO₂ et le fluide diélectrique contient à l'intérieur un colorant de couleur sombre. 10
8. Le dispositif de visualisation de la revendication 1, dans lequel le fluide diélectrique comprend l'un au moins de (i) un solvant consistant en huile d'isoparaffine et (ii) du trichlorotrifluoroéthane. 15
9. Le dispositif de visualisation de la revendication 7, dans lequel chaque particule comprend un noyau et un additif de maîtrise de charge fixé au noyau. 20
10. Le dispositif de visualisation de la revendication 1, dans lequel les micro-capsules ont des surfaces intérieures présentant une résistivité, le fluide présentant une résistivité pratiquement égale aux résistivités des surface intérieures. 25
11. Le dispositif de visualisation de la revendication 1, dans lequel les micro-capsules sont en contact les unes avec les autres dans un réseau. 30
12. Le dispositif de visualisation de la revendication 1, dans lequel les micro-capsules sont dispersées dans une matrice solide. 35
13. Le dispositif de visualisation de la revendication 1, dans lequel le moyen pour créer une différence de potentiel comprend un élément piézoélectrique. 40
14. Le dispositif de visualisation de la revendication 13, dans lequel les micro-capsules sont arrangées sous la forme d'une multiplicité d'éléments de visualisation bistables non émissifs, pouvant être actionnés sélectivement, placés entre les première et seconde électrodes, les éléments de visualisation subissant une réponse visuelle en réaction à une différence de potentiel entre les électrodes, la réponse visuelle persistant malgré la suppression de la différence de potentiel. 45
15. Le dispositif de visualisation de la revendication 14, comprenant en outre: 50
- un logement définissant une chaussure incluant une semelle, l'élément piézoélectrique étant associé à la chaussure de façon qu'une flexion de celle-ci produise la différence de po-

tentiel; et

un moyen, connecté à l'élément piézoélectrique, pour coupler sélectivement les éléments de visualisation à l'élément piézoélectrique sur la base d'une valeur de comptage de flexions et en une configuration représentative de la valeur de comptage.

16. Le dispositif de visualisation de la revendication 14, dans lequel l'élément piézoélectrique est associé à un substrat en papier de façon que le pliage du substrat en papier déforme l'élément piézoélectrique; et le dispositif de visualisation comprend un moyen pour connecter sélectivement au moins un élément de visualisation à l'élément piézoélectrique, une déformation de l'élément piézoélectrique produisant les réponses visuelles dans l'au moins un élément de visualisation qui lui est connecté.
17. Le dispositif de visualisation de la revendication 13, dans lequel les micro-capsules sont constituées comme au moins un élément de visualisation, l'élément de visualisation réagissant visuellement à une différence de potentiel entre les électrodes; et l'élément piézoélectrique est un élément piézoélectrique de visualisation, ce dispositif de visualisation comprenant en outre un élément piézoélectrique d'excitation en couplage acoustique avec l'élément piézoélectrique de visualisation, un moyen pour appliquer une tension alternative à l'élément d'excitation à une fréquence d'excitation, pour faire en sorte que l'élément piézoélectrique de visualisation produise une tension alternative; et un moyen pour redresser la tension alternative provenant de l'élément piézoélectrique de visualisation, la tension redressée fournissant la différence de potentiel.
18. Le dispositif de visualisation de la revendication 17, dans lequel le moyen pour appliquer une tension alternative à l'élément d'excitation agit sur l'élément piézoélectrique de visualisation de façon qu'il produise une tension alternative, la tension alternative fournissant la différence de potentiel; ce dispositif de visualisation comprenant en outre:
- au moins un filtre intercalé entre l'élément piézoélectrique de visualisation et les électrodes, l'au moins un filtre étant configuré pour (i) transmettre l'énergie électrique alternative à l'intérieur d'une bande de fréquence prédéterminée, de façon que la visualisation ne soit pas affectée par des fréquences d'excitation à l'extérieur de la bande prédéterminée, ou (ii) atténuer l'énergie électrique alternative à l'intérieur d'une bande de fréquence prédéterminée, de façon que la visualisation soit affectée seulement par des fréquences d'excitation à l'extérieur de la bande prédéterminée; et

- un moyen, connecté à l'élément piézoélectrique de visualisation, pour redresser la tension alternative provenant du filtre et fournir ainsi la différence de potentiel.
- 19.** Le dispositif de visualisation de la revendication 18, dans lequel l'au moins un filtre est un filtre passe-bande ou un filtre coupe-bande.
- 20.** Le dispositif de visualisation de la revendication 18, comprenant des premier et second filtres disposés en parallèle et connectés de façon opposée à l'élément de visualisation, le premier filtre transmettant ou atténuant l'énergie alternative à l'intérieur d'une première bande de fréquence, et le second filtre transmettant ou atténuant l'énergie alternative à l'intérieur d'une seconde bande de fréquence, l'application sélective à l'élément piézoélectrique de visualisation d'énergie alternative à l'intérieur des première et seconde bandes de fréquence produisant des réponses visuelles opposées du dispositif de visualisation.
- 21.** Le dispositif de visualisation de la revendication 20, dans lequel les premier et second filtres sont des filtres passe-bande ou coupe-bande.
- 22.** Un système de visualisation non émissif comprenant un dispositif de visualisation électrophorétique défini dans la revendication 13.
- 23.** Le dispositif de visualisation de la revendication 18, comprenant en outre:
- a. un boîtier de montre pour contenir l'élément piézoélectrique d'excitation; et
 - b. un bracelet de montre, fixé au boîtier de montre, pour porter l'élément piézoélectrique de visualisation.
- 24.** Un système de visualisation non émissif comprenant:
- a. un substrat en papier;
 - b. au moins un élément de visualisation électrophorétique associé au substrat en papier, l'élément de visualisation électrophorétique comprenant des micro-capsules discrètes pouvant être déposées, contenant chacune un fluide diélectrique et une suspension à l'intérieur de celui-ci de particules présentant des charges de surface, le fluide et les particules formant un contraste visuel;
 - c. une source d'énergie pour créer une différence de potentiel aux bornes de l'au moins un élément de visualisation; et
 - d. un moyen pour actionner sélectivement la source d'énergie.
- 25.** Le système de visualisation de la revendication 24, dans lequel la source d'énergie est un élément piézoélectrique.
- 26.** Le système de visualisation de la revendication 25, dans lequel l'élément piézoélectrique est associé au substrat en papier de façon qu'un pliage du substrat en papier déforme l'élément piézoélectrique, en créant ainsi la différence de potentiel.

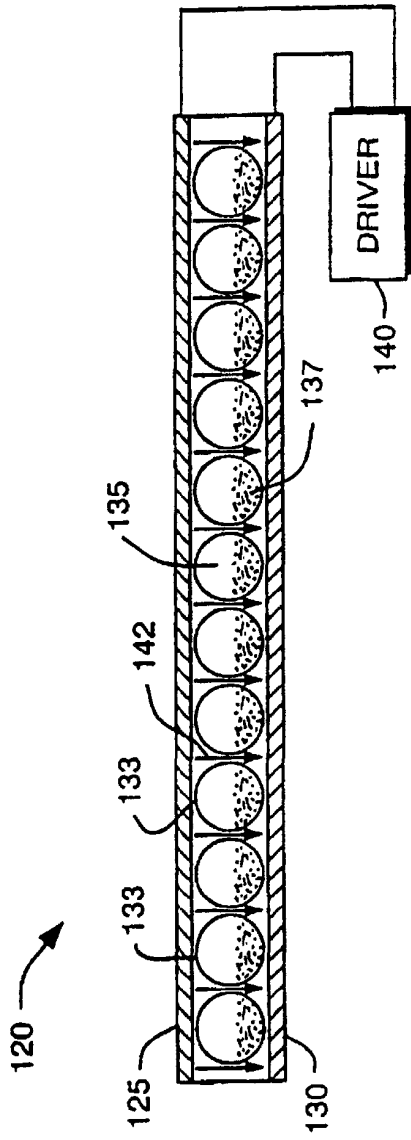


FIG. 1A

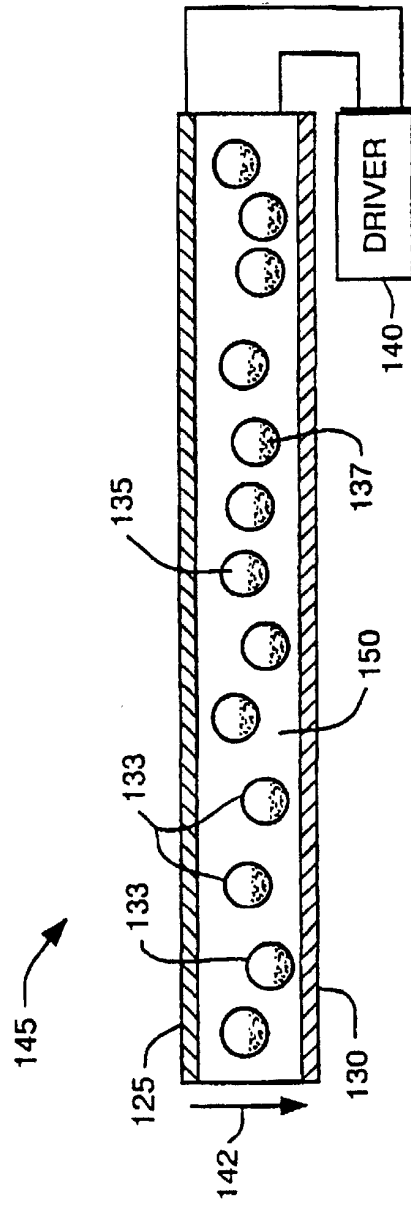


FIG. 1B

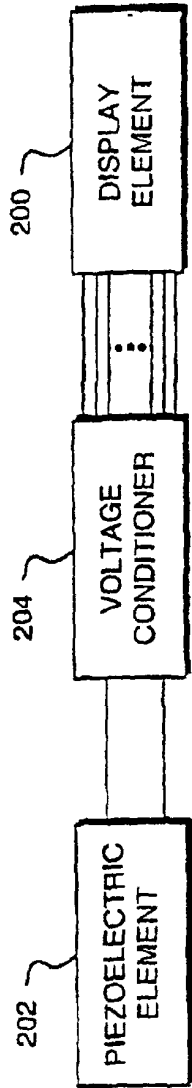


FIG. 2A

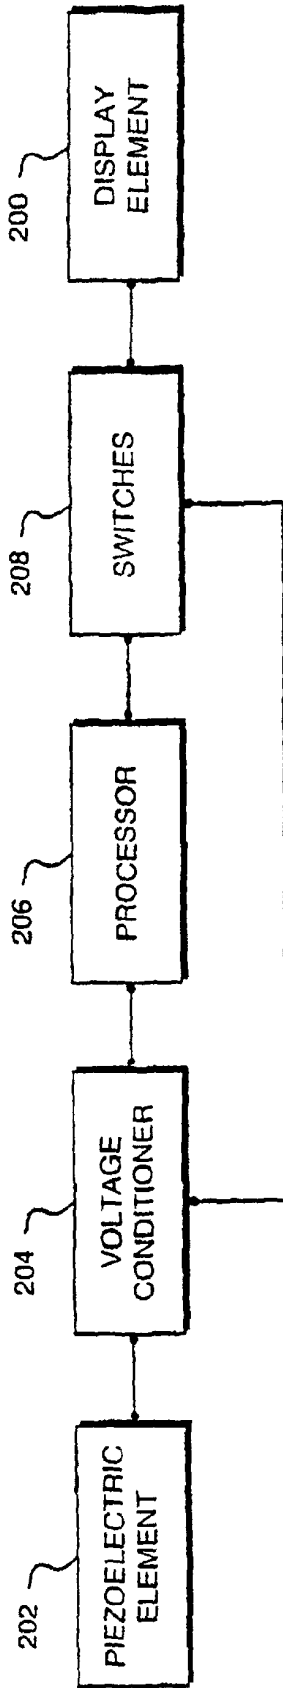


FIG. 2B

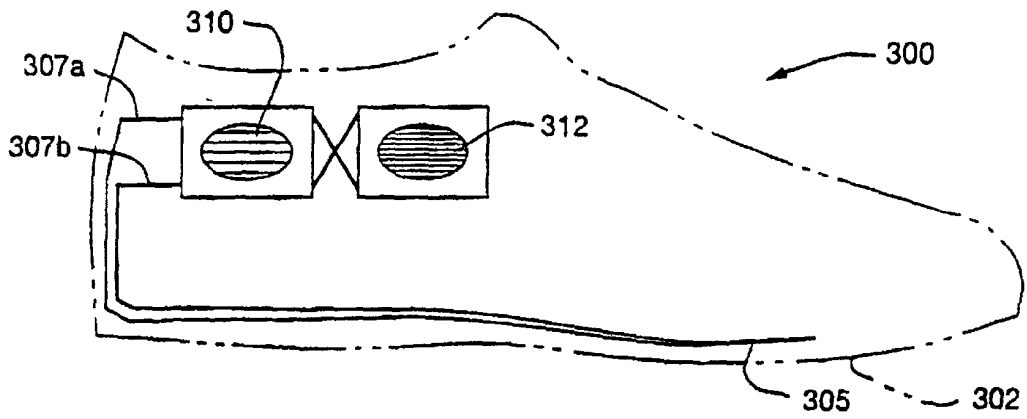


FIG. 3

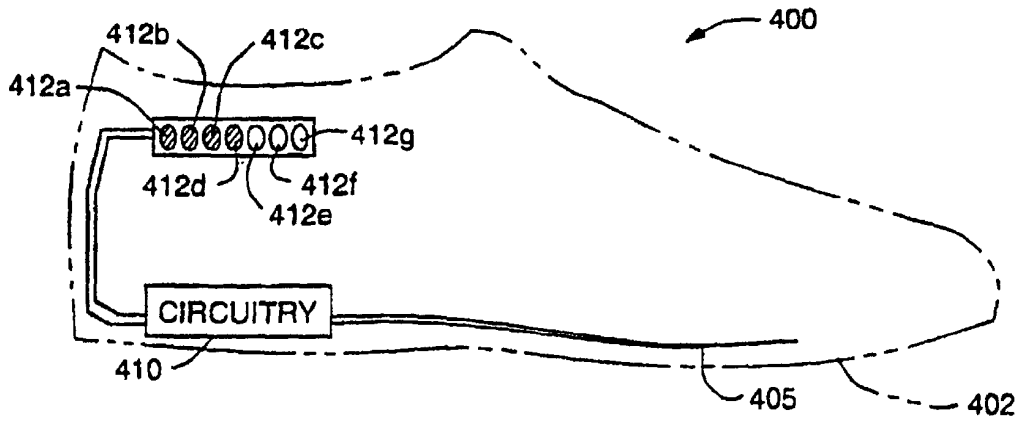


FIG. 4A

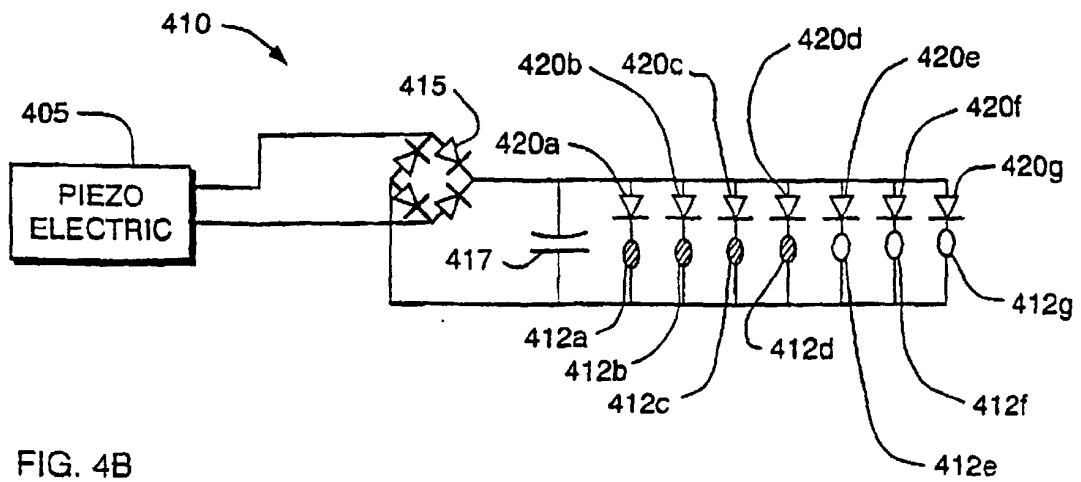


FIG. 4B

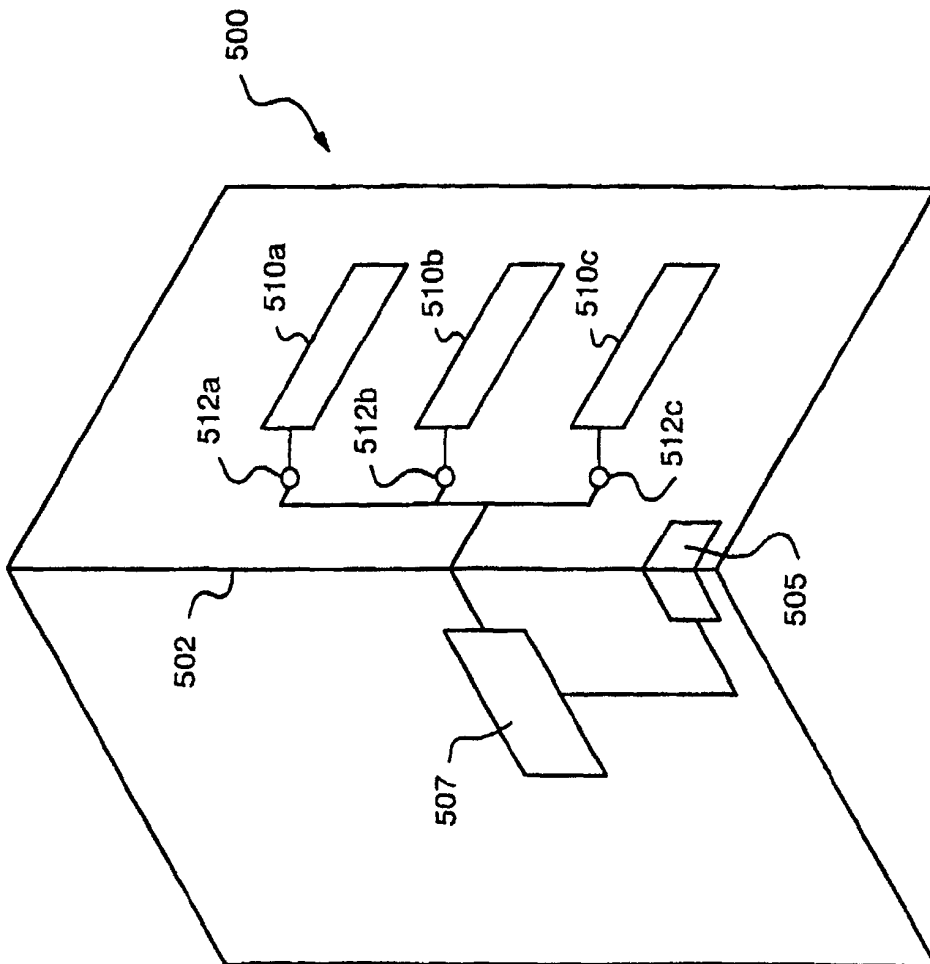


FIG. 5

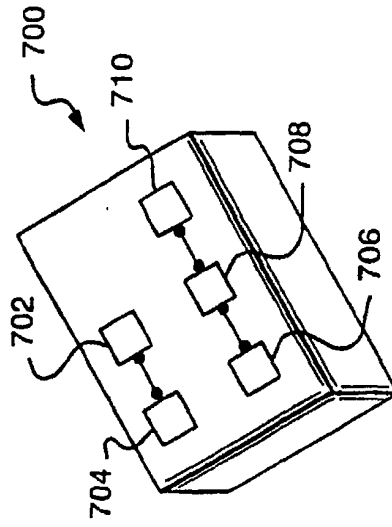


FIG. 7

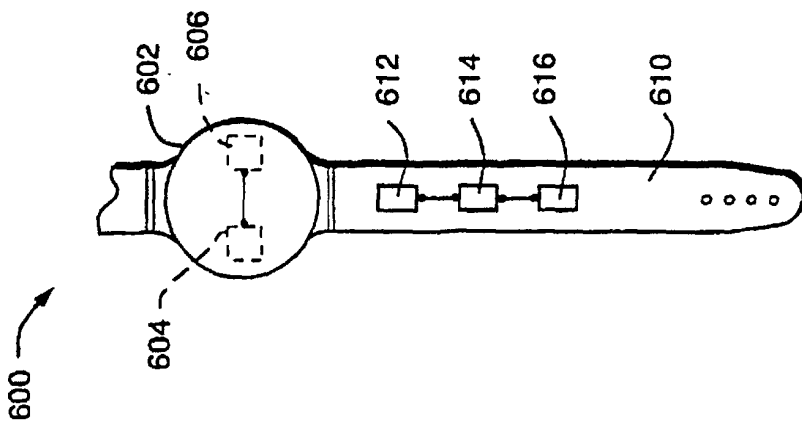


FIG. 6A

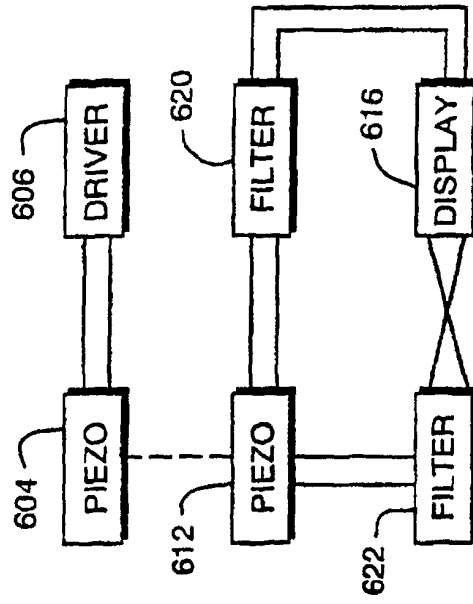


FIG. 6B